



BUILDING THE BEST SINCE 1886



Antique Brass



White



Brushed Nickel




Seville II™

A remarkable ability to fit almost any room or style makes the Seville a fan for all seasons. Ideal for rooms where a large fan may overwhelm the décor, the 112cm Seville is a small wonder.


- 24034 Antique Brass with five Walnut/Medium Oak blades
- 24037 White with five White/Light Oak blades
- 24038 Brushed Nickel with five Maple/Grey blades
- 24039 New Bronze with five Dark Cherry/Medium Oak blades



Seville II™

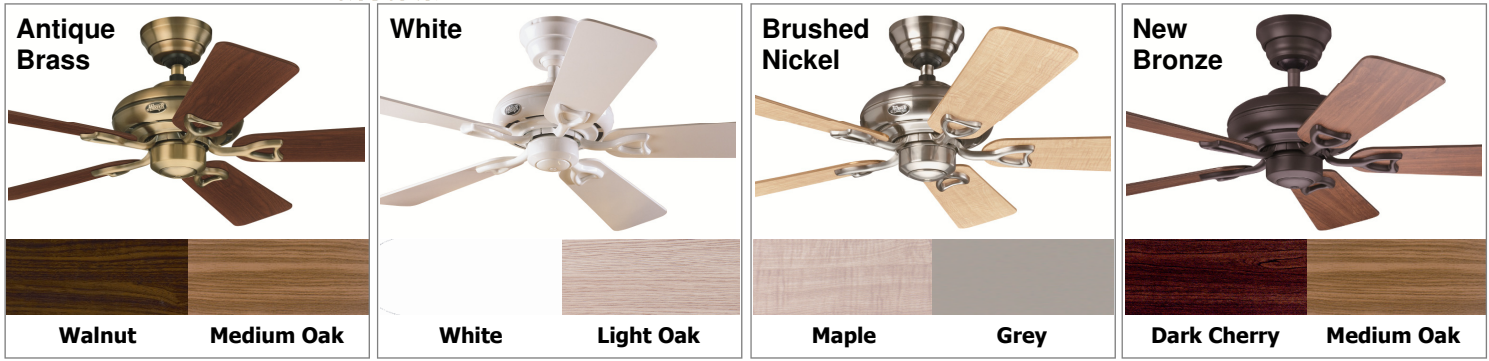

SIZE & BLADES:	112cm (44") Dia. from blade tip to blade tip.				
	Five reversible plywood blades. The blades are reversible with different finishes designed to compliment the motor colour.				
	12 Degree blade pitch.				
MOTOR:	Hunter's patented AirMax™ motor with internal impellers. 16 pole. 172 x 15mm 100Watt motor with heavy gauge copper windings, silicon steel laminations, precision sealed bearings, and multiple cooling fins, all in a rugged die cast aluminium housing.				
CONTROLLER:		Supplied with 3 speed pull chain for fan operation.			
		<ul style="list-style-type: none"> Suitable with Hunter wall controls. Suitable with Hunter remote controls. 			
CANOPY:	Hunter's patented WobbleFree™ canopy with Anti Vibration Technology (AVT) Hunter's patented triangular hanger ball system reduces torque and gives Hunter fans the ability to self-balance, eliminating wobble for rock solid performance, year after year.				
LOCATION:	Indoor use only.				
MOUNTING:	Easy to install in one of 3 mounting positions: <ul style="list-style-type: none"> Flush mounting on flat ceilings. Standard mounting on flat ceilings. Angled mounting on raked ceilings up to 34-Deg. 				
LIGHT KIT:	Suitable for use with most Hunter light kits.				
FEATURES:	Reversing switch for both summer and winter operation. <ul style="list-style-type: none"> Save up to 47% on summer cooling costs, Save up to 24% on winter heating costs. 				
ENERGY STAR:	Energy Star Rated. Proven energy efficient ceiling fan.				
PERFORMANCE: <i>NB: Performance testing carried out in laboratory approved for energy star testing and certification</i>	SPEED	WATTAGE*	RPM	AIRFLOW ** (in M ³ /HR)	EFFICIENCY (in M ³ /HR/W)
	HIGH:	63.6	235	7,822	123.00
	MEDIUM:	45.0	210	6,742	149.80
	LOW:	21.7	142	4,504	207.60
* Wattage for Energy Star data and is based on actual not rated value as shown on rating label					
** Airflow data tested using Energy Star Solid State Method (Developed by Hunter Fan Company)					

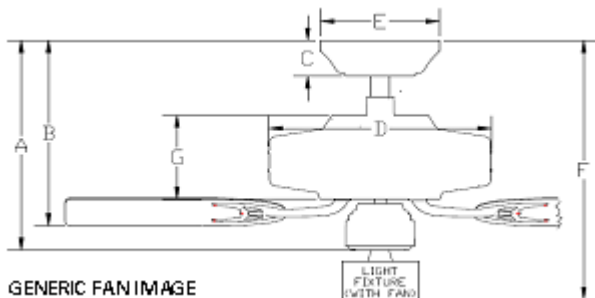

A	B	C	D	E	F	G
STANDARD MOUNT (cm) NB: Using standard downrod.						
33.02	27.71	8.26	27.20	15.75	N/A	12.06
FLUSH MOUNT (cm) NB: No downrod installed.						
25.83	20.52	8.26	27.20	15.75	N/A	12.06
ANGLED MOUNT (cm) NB: Using 91cm downrod.						
116.84	111.53	8.26	27.20	15.75	N/A	12.06