



LEDLINE EMERGENCY SLD200/4000 - 20/40W

Linear diffuse batten, compliant to AS/NZS 2293 emergency

Application

Wide body profile, perfect for end to end commercial installations

Design Specifications

- Pressed steel body profile, powder coat white finish
- Designed with a large terminal block for easy installation
- High efficiency SMD LED chips, CCT 4000K
- Designed to enable end to end installation and for both maintained and non-maintained systems
- LiFePO4 battery included (12 month warranty)
- LED charge status display and test switch, Guaranteed 90 minutes emergency function, corridorSTANDBY functions are optional for SLD4000CW/EM




Technical Specification

Model No.	Description	Input Voltage (V/AC)	CCT (K)	CRI	Dim (mm)
SLD2000CW/EM	LED BATTEN 20W 4K EMERG. SLD2000CW + SL9721 EMP	240	4000	80	600(L) x 100(W) x 77(H)
SLD4000CW/EM	LED BATTEN 40W 4K EMERG. SLD4000CW + SL9721 EMP	240	4000	80	1120(L) x 100(W) x 77(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

SLD2000

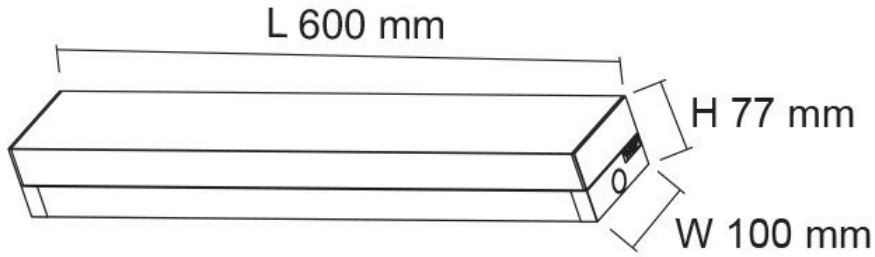

SLD4000

