



## OPAL SO3700/TC/DP - 8/30W

LED Oyster 8 to 30 watt with selectable colour temperature and dual power

### Application

A perfect choice for apartments or commercial spaces

### Design Specifications

- Select colour temperature with DIP switch 3000K / 4000K / 6000K
- Durable powder coated steel body profile with a high performance opal PMMA diffuser
- High efficiency SMD LED chips, CRI > 80
- Integral constant current non-dimmable LED driver
- Integral dual power selection for DP models
- Two versatile profile sizes 8/16 or 15/30 watt, Microwave sensor option (SO3700/40L/TC/DP)


### Performance

Dimmable - **OPTIONAL**

Dimmer Type - **Trailing edge, 1-10V, DALI / DSI**

(SO3700/40L/TC/DP)

In Built Sensor - **OPTIONAL**

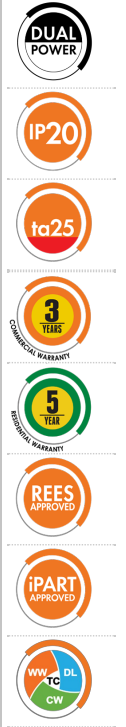

### Technical Specification

Model No.	Description	Input Voltage (V/AC)	Multiple Wattage	Lumens (lm)	CCT (K)	CRI
SO3700/30L/TC/DP	LED OYSTER 8/16W 310mm 3/4/6K	240	8/16	1160/1260/1200	3000/4000/6000	80
SO3700/40L/TC/DP	LED OYSTER 15/30W 390mm 3/4/6K	240	15/30	2450/2680/2550	3000/4000/6000	80

### Technical Specification

Model No.	Beam Angle (°)	Body Colour	Dim (mm)	Diameter (mm)
SO3700/30L/TC/DP	120	White	310(W) x 100(H)	390
SO3700/40L/TC/DP	120	White	390(W) x 112(H)	

Note: Lumens (lm) values shown are at full power rating

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".



**Photometric Data**

Unit: cd C0/C180 \_\_\_\_\_ C90/C270 \_\_\_\_\_

**SO3700/30L/TC/DP at 4000K**

**SO3700/40L/TC/DP at 4000K**

